


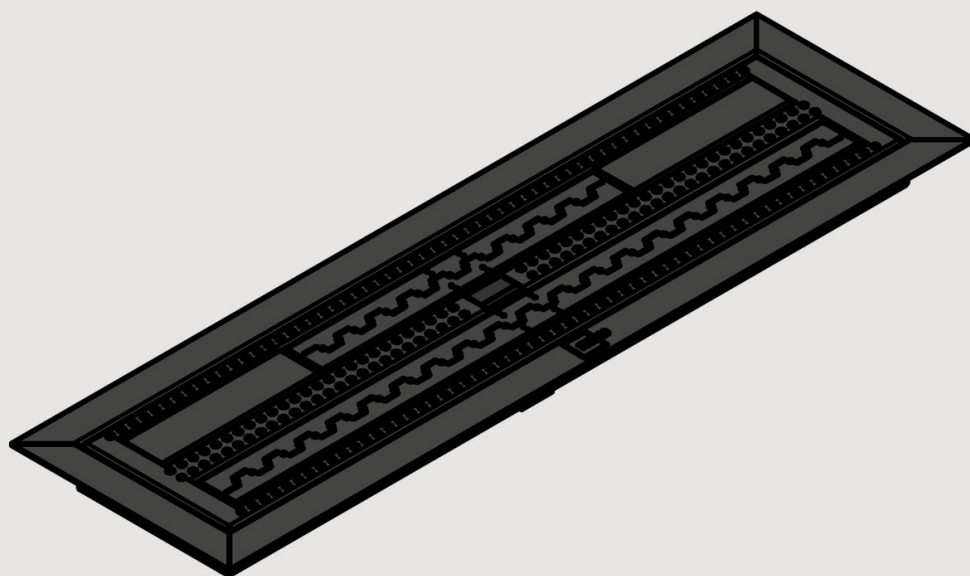

GAS BURNERS

Series BGP

Collection 2026/2027

FUEGOLO

BGP 600

BGP 1000

BGP 1400

BGP 1800

Minimal design. Maximum flame.

Minimal design. Maximum flame.

At Fuegolo, we believe that fire is more than a source of warmth. It is an expression of design, atmosphere and emotion.

Our passion is to create premium gas fireplaces that bring the beauty of a real flame into contemporary spaces. Combining refined aesthetics, quality materials, precision engineering and attention to detail, we create fire solutions designed to become a natural part of modern architecture and interior design.

The BGP series is available in four sizes from 600 to 1800 mm, with single, split line and dual independent burner options, so that each fire feature can be tailored to its space.

We are committed to continuously improving our products, focusing on quality, reliability, functionality and timeless design.


Because for us, fire is not simply a product. It is an experience.



Fuegolo
Premium gas fire
Designed in Spain




The collection



BGP 600

Single burner · Dual independent
Up to 12.6 kW direct heat output

p. 04



BGP 1000

Single burner · Split line · Dual
independent
Up to 17.9 kW direct heat output

p. 05



BGP 1400

Single burner · Split line
Up to 22.5 kW direct heat output

p. 06



BGP 1800

Single burner · Split line
Up to 25.3 kW direct heat output

p. 07

BURNER CONFIGURATIONS

Single burner

One line, independently controlled

Split line


One full line + one partial line, independently controlled

Dual independent

Two separate lines, independently controlled


BGP 600

Gas burner 600



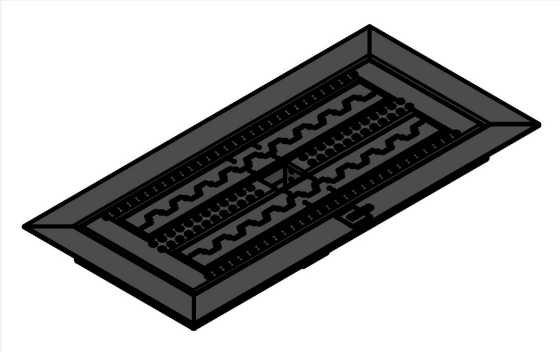


3D VIEW · DUAL INDEPENDENT

SINGLE BURNER

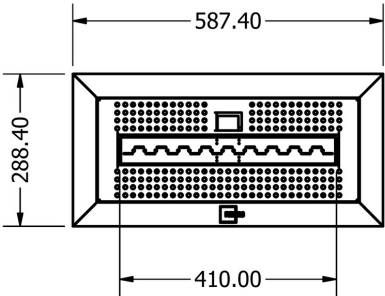

DUAL INDEPENDENT

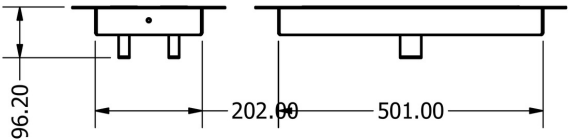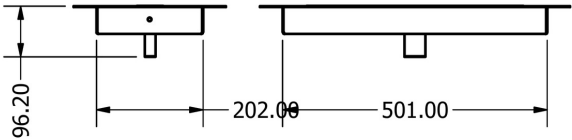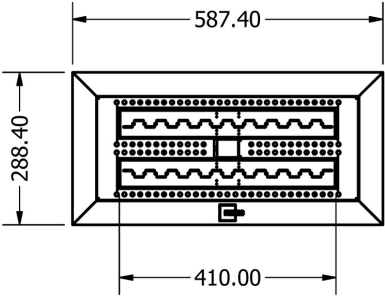


TECHNICAL DATA

Configuration	Natural gas range	Propane range	Direct heat output	Energy eff. index	Useful eff. nominal	Useful eff. min. load	Flue diameter
Single burner One line, independently controlled	2.4 - 5.9 kW	2.7 - 6.3 kW	6.3 kW	85	0.86	0.61	130-200 mm
Dual independent Two separate lines, independently controlled	2.4 - 11.8 kW	2.7 - 12.6 kW	12.6 kW	85	0.86	0.61	130-200 mm


Dimensions in mm.

BGP 1000

Gas burner 1000

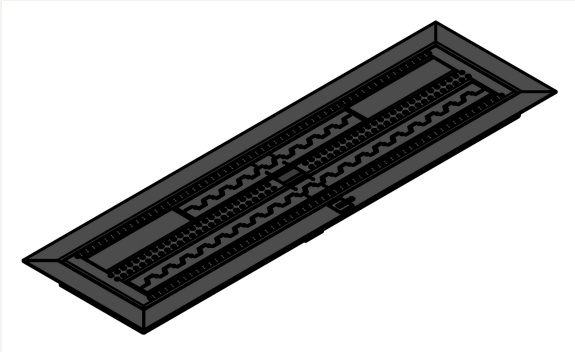

3D VIEW · SPLIT LINE

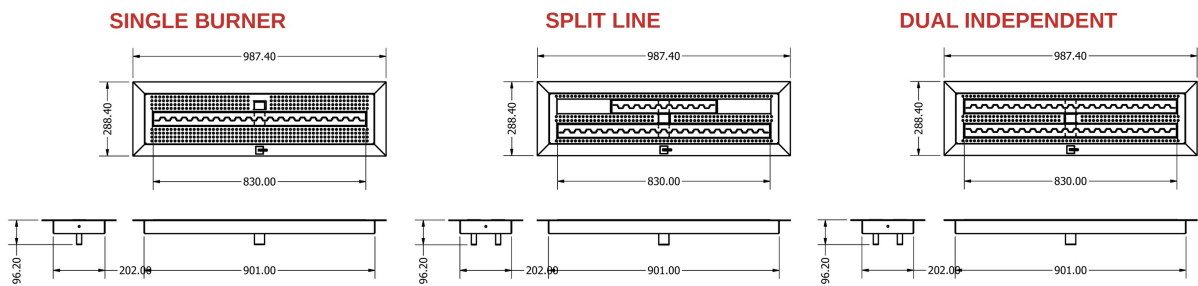

TECHNICAL DATA

Configuration	Natural gas range	Propane range	Direct heat output	Energy eff. index	Useful eff. nominal	Useful eff. min. load	Flue diameter
Single burner One line, independently controlled	4.3 – 10.5 kW	4.8 – 11.6 kW	11.6 kW	85	0.86	0.61	130–200 mm
Split line One full line + one partial line, independently controlled	4.3 – 16.4 kW	4.8 – 17.9 kW	17.9 kW	85	0.86	0.61	130–200 mm
Dual independent Two separate lines, independently controlled	4.3 – 16.4 kW	4.8 – 17.9 kW	17.9 kW	85	0.86	0.61	130–200 mm


Dimensions in mm.

BGP 1400


Gas burner 1400




3D VIEW · SPLIT LINE

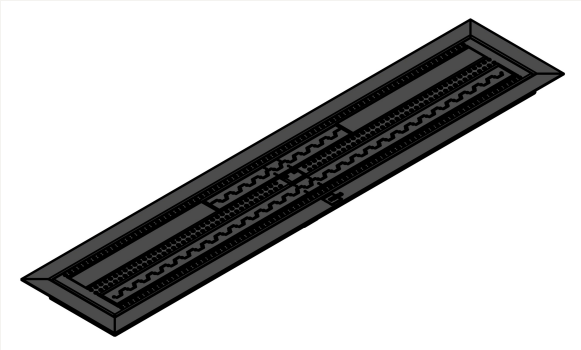

SINGLE BURNER

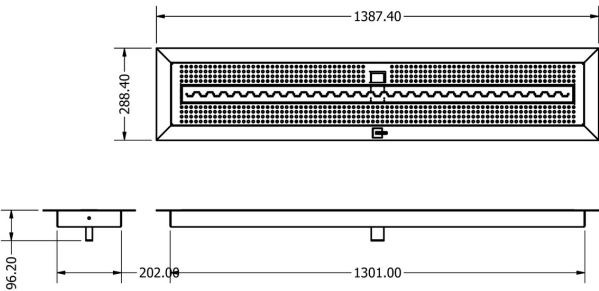

SPLIT LINE

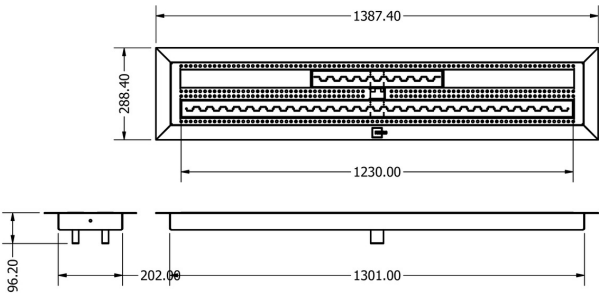


TECHNICAL DATA

Configuration	Natural gas range	Propane range	Direct heat output	Energy eff. index	Useful eff. nominal	Useful eff. min. load	Flue diameter
Single burner One line, independently controlled	6.2 – 15.3 kW	6.6 – 16.2 kW	16.2 kW	85	0.86	0.61	130–200 mm
Split line One full line + one partial line, independently controlled	6.2 – 21.2 kW	6.2 – 22.5 kW	22.5 kW	85	0.86	0.61	130–200 mm

Dimensions in mm.


BGP 1800

Gas burner 1800

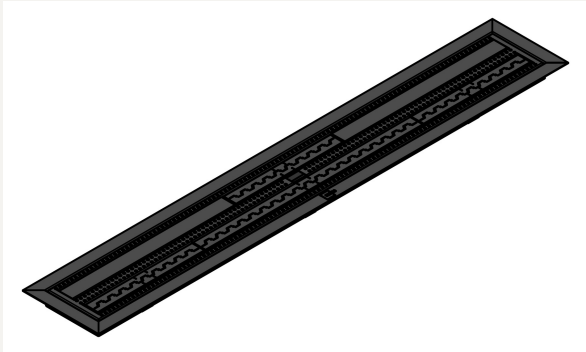


3D VIEW · SPLIT LINE

SINGLE BURNER

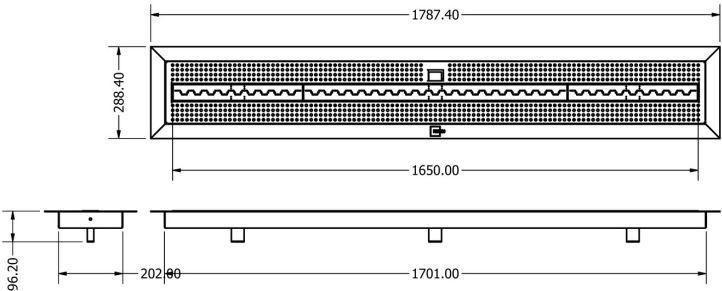

SPLIT LINE

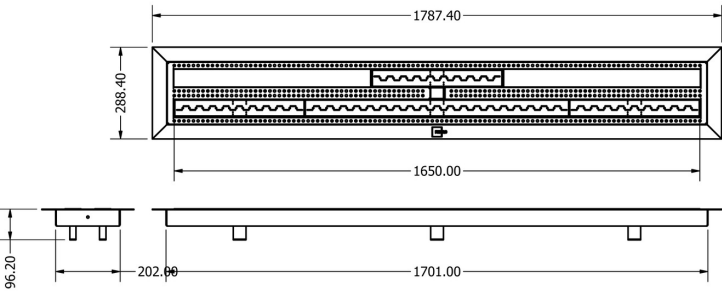

TECHNICAL DATA

Configuration	Natural gas range	Propane range	Direct heat output	Energy eff. index	Useful eff. nominal	Useful eff. min. load	Flue diameter
Single burner One line, independently controlled	7.9 – 19.9 kW	8.4 – 20.9 kW	20.9 kW	85	0.86	0.61	150–250 mm
Split line One full line + one partial line, independently controlled	4.3 – 24.2 kW	4.8 – 25.3 kW	25.3 kW	86	0.88	0.61	180–250 mm

Dimensions in mm.

Control systems



Every Fuegolo gas model is available with FGR-1 or FGR-2 — choose it when ordering.



Receiver FGR-1



Remote FGT-1

FGR-1 + FGT-1

Remote ignition, thermostat and timer.



Receiver FGR-2



Remote FGT-2

FGR-2 + FGT-2

All FGR-1 functions plus flame height, pilot, rear burner, fan, light and AUX.

FUNCTION	FGR-1 + FGT-1	FGR-2 + FGT-2
Remote on / off and electronic ignition	•	•
Flame height adjustment (5 levels)	—	•
Thermostat – SET mode	•	•
Timer (15–180 min)	•	•
Standing pilot	—	•
Rear burner on / off control	—	•
Childproof and low battery indicator	•	•
Circulation fan · 3 speeds · delay ON/OFF	—	•
Light dimmer · 3 levels	—	•
AUX output	—	•
Radio frequency	434 MHz	434 MHz
Remote handset batteries	3 × 1.5 V AAA	3 × 1.5 V AAA
Receiver power	AC adapter 6 V DC, 1.5 A	4 × 1.5 V AA or approved AC adapter

Operating instructions for both systems are included in the installation manual and available at fuegolo.com/downloads.



Minimal design. Maximum flame.

Designed in Spain

fuegolo.com · 0034 664 890098